

RX-FullDraw 4® Quick Reference Card

BASIC OPERATIONS

Press *POWER* to activate the rangefinder.

Press and release *POWER* for a single distance reading.

Press and hold *POWER* to scan, continuously updating distance readings (*recommended*).


MENU NAVIGATION

Press and hold *MODE* for >1 second and then release, to enter the menu.

Press and release *MODE* repeatedly to advance through the menu.

Press and release *POWER* to toggle functions.

DISPLAY AT A GLANCE

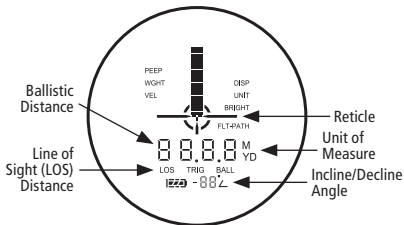

ARCHER'S ADVANTAGE™ SOLUTION

To program the ballistic calculator, navigate through the Quick Set Menu and input the following ballistic values:

- The velocity of your arrow (measured at 36")
- The weight of your arrow
- The peep height (measured from the center of the arrow shaft perpendicular to the center of the peep at full draw).

FLIGHTPATH™

Flightpath technology allows you to determine your arrow's clearance at various distances. Flightpath is calculated using the Archer's Advantage™ ballistic solution, therefore no additional programming is required.

